




INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

J1046 U.S. PTO

10/022896



067643  
1081

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

Signed

Dated

18 SEP 2001



1/77

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



1. Your reference

NJH/5867874

2. Patent application number

(The Patent Office will fill in this part)

0031508.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Patents ADP number (if you know it)

ALCATEL  
54 RUE LA BOETIE  
75008 PARIS  
FRANCE

If the applicant is a corporate body, give the country/state of its incorporation

FRANCE

75 176 91 001

4. Title of the invention

BROADBAND RAMAN AMPLIFIER

5. Name of your agent (if you have one)

MEWBURN ELLIS

Address for service@ in the United Kingdom to which all correspondence should be sent (including the postcode)

YORK HOUSE  
23 KINGSWAY  
LONDON  
WC2B 6HP

Patents ADP number (if you know it)

109006

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

## Continuation sheets of this form

Description 10

Claim(s) 3

Abstract 0

Drawing(s) 2

only 8

10. If you are also filing any of the following, state how many against each item

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 0

Any other documents (Please specify) 0

11. I/We request the grant of a patent on the basis of this application.

Signature

Nigel Hackney

Date

21 December 2000

12. Name and daytime telephone number of person to contact in the United Kingdom Nigel Hackney 0161 834 0201

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

BROADBAND RAMAN AMPLIFIER

The present invention relates to optical amplifiers and in particular to wide bandwidth optical amplifiers. The present invention is particularly applicable to Raman amplifiers.

Raman amplification is considered to be particularly suitable for use in wideband and ultra wideband optical amplifiers, for example used in wavelength division multiplexing transmission systems. The reason for this is that, unlike Erbium doped fibre amplifiers, gain can be provided at a predetermined range of wavelengths by choosing a suitable pump wavelength. In addition, Raman amplification can be distributed along a transmission fibre, giving an improved optical signal-to-noise ratio, lower signal launch power and therefore longer transmission distances without requiring further amplification and/or repetition.

However one drawback is that for a Raman amplifier using a single pump wavelength only, the gain profile of the amplifier is far from flat. Typically the gain profile will be a curve with a peak at the wavelength chosen for maximum amplification. Often it is desirable for the amplifier to operate adequately over a range of wavelengths and so in order to improve the flatness of the

amplifier gain profile over a wide range of wavelengths, several pump sources may be used.

Figure 1 shows a prior art wideband Raman optical amplifier. In Figure 1, a signal to be amplified is input to fibre 2. In addition, pump radiation is provided to fibre 2 through the signal and pump coupler 4. The resulting amplified signal is output on fibre 6. N different pump sources (generally indicated 8) are provided and each pump source produces pump radiation of a different wavelength from the other pump sources i.e. pump radiation of wavelengths  $\lambda_1, \lambda_2, \lambda_3 \dots \lambda_N$  are provided. All the sources of pump radiation are fed to a multiplexer 10 which multiplexes the pump sources and transmits the resulting wideband wavelength pump radiation to the signal and pump coupler 4. In this way, signals travelling on the fibre connected to the signal coupler 4 may be amplified.

This solution is based on the assumption that the Raman gain which results from these multiple pumps is close to the superposition of the Raman gains which would result from the use of each of the pump sources individually. Therefore, by choosing appropriate pump wavelengths, powers and taking into account interpump amplification a reasonably flat gain profile can be achieved over a predetermined wavelength band.

However this solution has a number of drawbacks mainly resulting from the fact that more than one pump source is required. Firstly, pumps are expensive components and secondly the inclusion of a number of pumps will substantially increase the size of the amplifiers. Also the use of a number of pumps will increase the pump driving current requirements, which can be particularly restrictive where the amplifier is for use in submarine fibre optical cable systems where the line current has to be kept reasonably low. Furthermore, in systems where higher reliability is needed, the number of redundant pumps included may be as high as the number of working pumps which in turn exaggerates the problems of cost, size and complexity for the amplifier.

The present invention aims to provide a pump laser for Raman amplification which mitigates some or all of these problems.

Accordingly, in a first aspect, the present invention provides a wide bandwidth, gain flattened Raman amplifier including a laser source of pump radiation, and means for producing from the pump source a plurality of wavelengths of pump radiation including means for providing adjustable optical feedback to the pump source at a plurality of radiation wavelengths. Alternatively, instead of or in addition to the means for providing adjustable optical

feedback, the invention may include means for independent power control of each wavelength.

The amplifier may include a coupler for coupling the pump radiation into the signal fibre and may include the fibre (which can be the transmission fibre) where the amplification takes place.

Thus by producing multiple wavelength pump radiation from a single pump source, the number of pump sources which need to be provided can be reduced. Preferably only one pump source is included although in some circumstances more than one pump source may be provided with each pump source producing a plurality of different wavelengths of pump radiation. Also further pump source(s) may need to be provided for the purposes of redundancy.

Preferably the means for producing the pump radiation includes one or more reflectors, for example gratings. Preferably each reflector produces optical feedback to the pump at one wavelength and the characteristics of the reflectors are selected such that each reflector produces optical feedback at an appropriate wavelength, typically different to the wavelengths produced by the other reflectors.

Preferably the amplifier includes control means for

controlling the optical feedback e.g. by selecting one or more wavelengths and/or attenuating radiation of selected wavelength(s).

Preferably the control means includes one or more variable optical attenuators and most preferably there is a separate variable attenuator for each reflector. In one embodiment, at least some radiation from more than one reflector is coupled simultaneously back into the pump to produce a plurality of pump radiation wavelengths. The pump radiation thus produced, at a plurality of wavelengths, is coupled into the signal path via the signal and pump coupler 4. In this way, a wideband optical amplifier can be provided still using fewer (and preferably only one) pump source of pump radiation. In such embodiments, the amount of attenuation provided by each variable optical attenuator may be suitably selected so as to provide an appropriate level of optical feedback to the pump at the corresponding reflector wavelength. Thus, the pump will provide pump radiation at each reflector wavelength, of magnitude which depends on the optical feedback at that wavelength. By controlling the optical feedback from each reflector, a desirable pump radiation spectrum can be achieved so as to provide an appropriate overall gain profile for the amplifier. For example, one desirable gain profile may be a flat response but in certain circumstances other profiles may be



desired. The characteristics of each variable attenuator may be determined or alternatively control means may be provided for controlling and/or adjusting the attenuation of each variable optical attenuators depending on the circumstances.

In some embodiments, rather than providing continuously variable levels of attenuation (or even a plurality of separate discrete levels of attenuation), each variable attenuator may only provide one level of attenuation. That is to say, for example, each variable optical variable attenuator may in fact be an optical switch providing either substantially no attenuation or substantially 100% attenuation depending on the setting of the switch. In such embodiments, the switches may be set so that only some, or indeed only one, of the reflectors provides optical feedback to the pump at any one time. In this way it is possible to provide a discretely wavelength tuneable amplifier spectrum using fewer (and preferably only one) pump source. Again, control means may be provided for selectively controlling the switches in order to change the overall characteristics of the amplifier.

Preferably the pump source is operated under the so-called "coherence collapse" regime so that it is possible that a single pump laser is locked onto a multiple number of wavelengths. This is particularly suitable for the

embodiment using the variable attenuators. Preferably the pump source is temperature stabilised, in order for its gain spectrum to remain unaltered during its operation.

Alternatively, instead of having to temperature stabilise the pump source, variations in the output power of the laser with temperature could be compensated by controlling the input current supplied to the laser. This is particularly suitable with the second embodiment described above utilising the optical switches.

In a second aspect, the present invention provides a method of providing a wide bandwidth Raman amplifier including the step of producing from a laser pump source, a plurality of wavelengths of pump radiation by providing adjustable optical feedback at these wavelengths.

Embodiments of the present invention will now be described by way of example with reference to the accompanying drawings in which:

Figure 1 is a schematic diagram of a prior art optical amplifier;

Figure 2 is a schematic diagram of a first embodiment of an optical amplifier according to the present invention; and

Figure 3 is a second embodiment of an optical amplifier according to the present invention.

Figure 4 is a third embodiment of an optical amplifier according to the present invention.

In Figure 2, a signal to be amplified is input along transmission fibre 2. Pump radiation is provided to fibre 2 via the signal and pump coupler 4. Raman amplification is taking place in fibre 2 and the amplified signal is output on a fibre 6. A single pump 20 is provided which preferably produces pump radiation of substantially wide bandwidth. The pump radiation is fed to a TAP coupler 22 which in turn feeds the pump radiation to a further coupler 24.

The coupler 24 couples the pump radiation to a plurality of variable optical attenuators. In Figure 2 only four optical attenuators 26, 28, 30, 32 are illustrated but of course any number may be included. Each of the optical attenuators 26 - 32 is associated with a respective reflector 34 - 40. The reflectors can, for example, be fibre Bragg gratings. Each grating 34 - 40 produces reflected radiation of correspondingly different wavelengths, which is shown in Figure 2 as  $\lambda_1, \lambda_2, \lambda_3$  and  $\lambda_N$  (indicating the possibility for N pump wavelengths).

The amount of reflection radiation produced by each reflector and fed back to coupler 24 is controlled by each of the respective variable optical attenuators 26 - 32.

The combined resulting reflection radiation is then fed to the pump to provide external optical feedback. The parameters of some or all of the variable optical attenuators may be controlled to vary the overall pump radiation spectrum. In this way, a multi wavelength wideband pump of variable characteristic can be provided.

The multiwavelength pump radiation thus produced - by optical feedback from a number of reflections at different wavelengths - is fed through the coupler 22 and signal and pump coupler 4 into the transmission fibre 2, where the signal amplification takes place.

Figure 3 shows a second embodiment of an amplifier according to the present invention. The structure is similar to the embodiment of Figure 2 and like numbers have been used for like items of equipment. However, in this embodiment the variable optical attenuators 26 - 32 of Figure 2 have been replaced by optical switches 42, 44, 46 and 48. Again, only four optical switches are shown but any suitable number may be used. In this embodiment, the optical switches may be operated so that only some, or indeed only one, of the radiation reflectors are operatively connected to the pump at any one time. In this way, a discretely wavelength tuneable pump is provided.

Figure 4 is a schematic diagram showing an embodiment of

the present invention in generic terms. A multiple wavelength pump (generally indicated by numeral 50) consists of a laser diode 52 coupled to a partial coupler 54 which is in turn coupled to means for providing adjustable optical feedback 56 under the control of control means 58. In use, as has been previously described, the means 56 is used to produce from the laser pump source 52 a plurality of wavelengths of pump radiation which may then be coupled to an amplifier 60 (not shown in Figure 4).

The above embodiments are given by way of example only and variations will be apparent to those skilled in the art.

CLAIMS

1. A wide bandwidth Raman amplifier including a laser pump source of pump radiation, and means for producing from the pump source a plurality of wavelengths of pump radiation including means for independent power control of each radiation wavelength.
2. An amplifier according to claim 1 including only one pump source.
3. An amplifier according to claim 1 or claim 2 wherein the means for producing the plurality of pump radiation wavelengths includes one or more reflectors.
4. An amplifier according to claim 3 wherein each reflector produces optical feedback to the pump source at one wavelength and the characteristics of the reflectors are selected such that each reflector produces optical feedback at a different wavelength to the wavelengths produced by the other reflectors.
5. An amplifier according to any of the above claims wherein the means of power control of each pump radiation wavelength includes one or more variable optical attenuators.

6. An amplifier according to claim 5 wherein there is a separate variable attenuator for each reflector.
7. An amplifier according to any one of the above claims wherein at least some pump radiation of more than one wavelength is coupled to the signal to be amplified.
8. An amplifier according to any of claims 5 to 6 including control means for controlling and/or adjusting the attenuation of each variable optical attenuator(s).
9. An amplifier according to any one of claims 1-4 wherein the means for providing adjustable optical feedback includes one or more optical switches providing either substantially no attenuation or substantially 100% attenuation depending on the setting of the switch.
10. An amplifier according to claim 9 including control means for selectively controlling the switches in order to change the overall characteristics of the amplifier.
11. A method of providing a wide bandwidth Raman amplifier including the step of producing from a pump laser source, a plurality of wavelengths of pump radiation by providing adjustable optical feedback to the laser source at these wavelengths.

12. A method of providing a wide bandwidth Raman amplifier including means for altering the amplifier gain profile during amplifier operation.



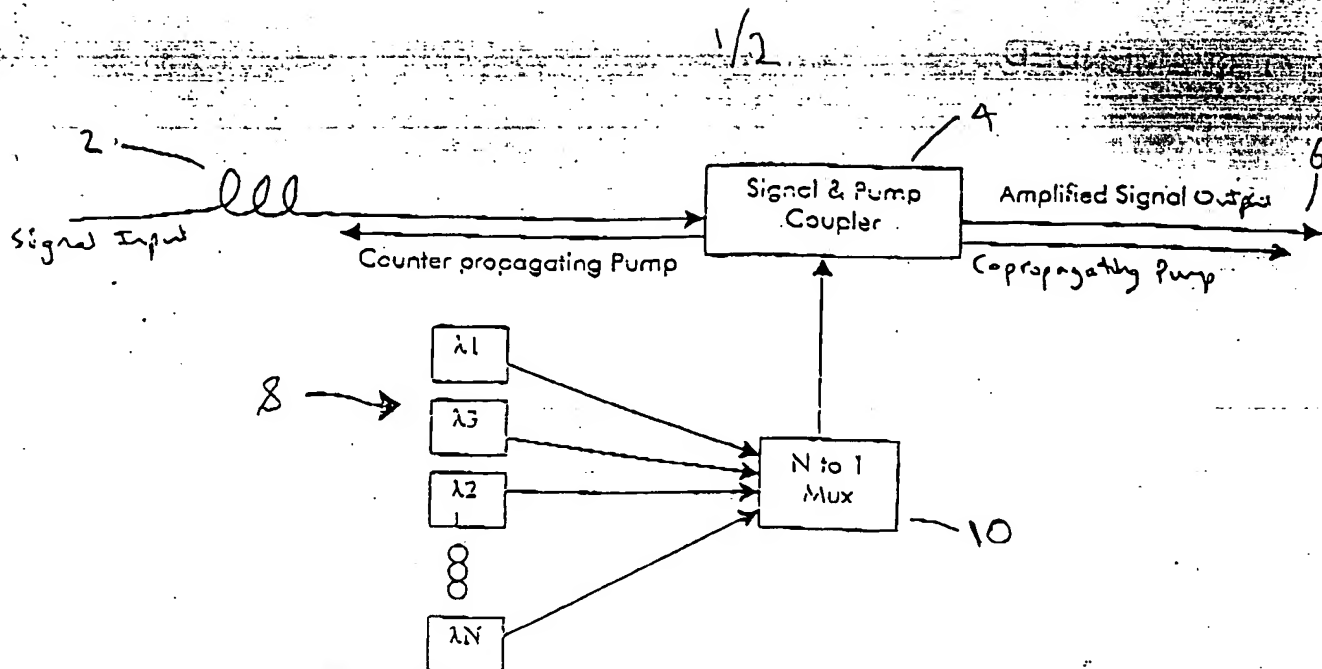


Figure 1.

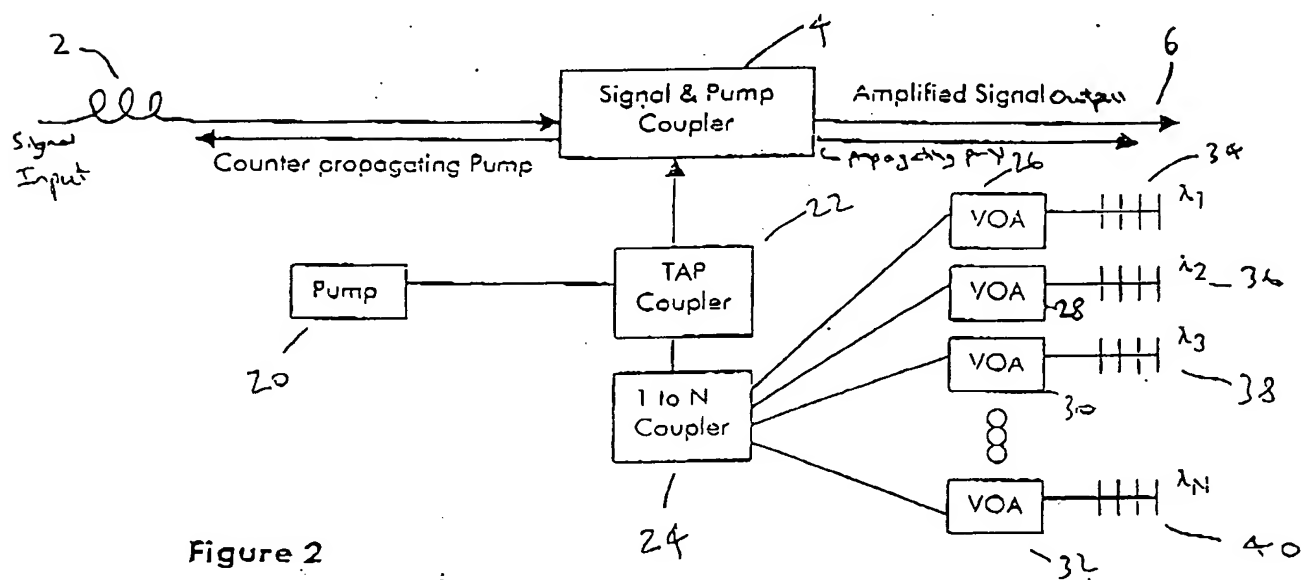


Figure 2

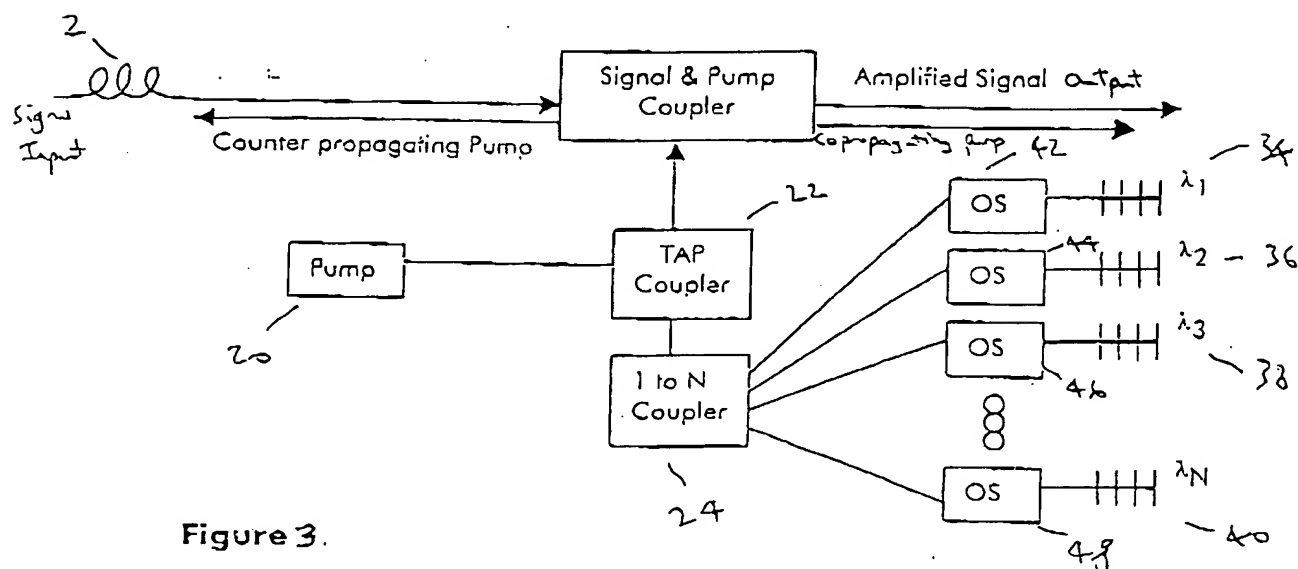


Figure 3.

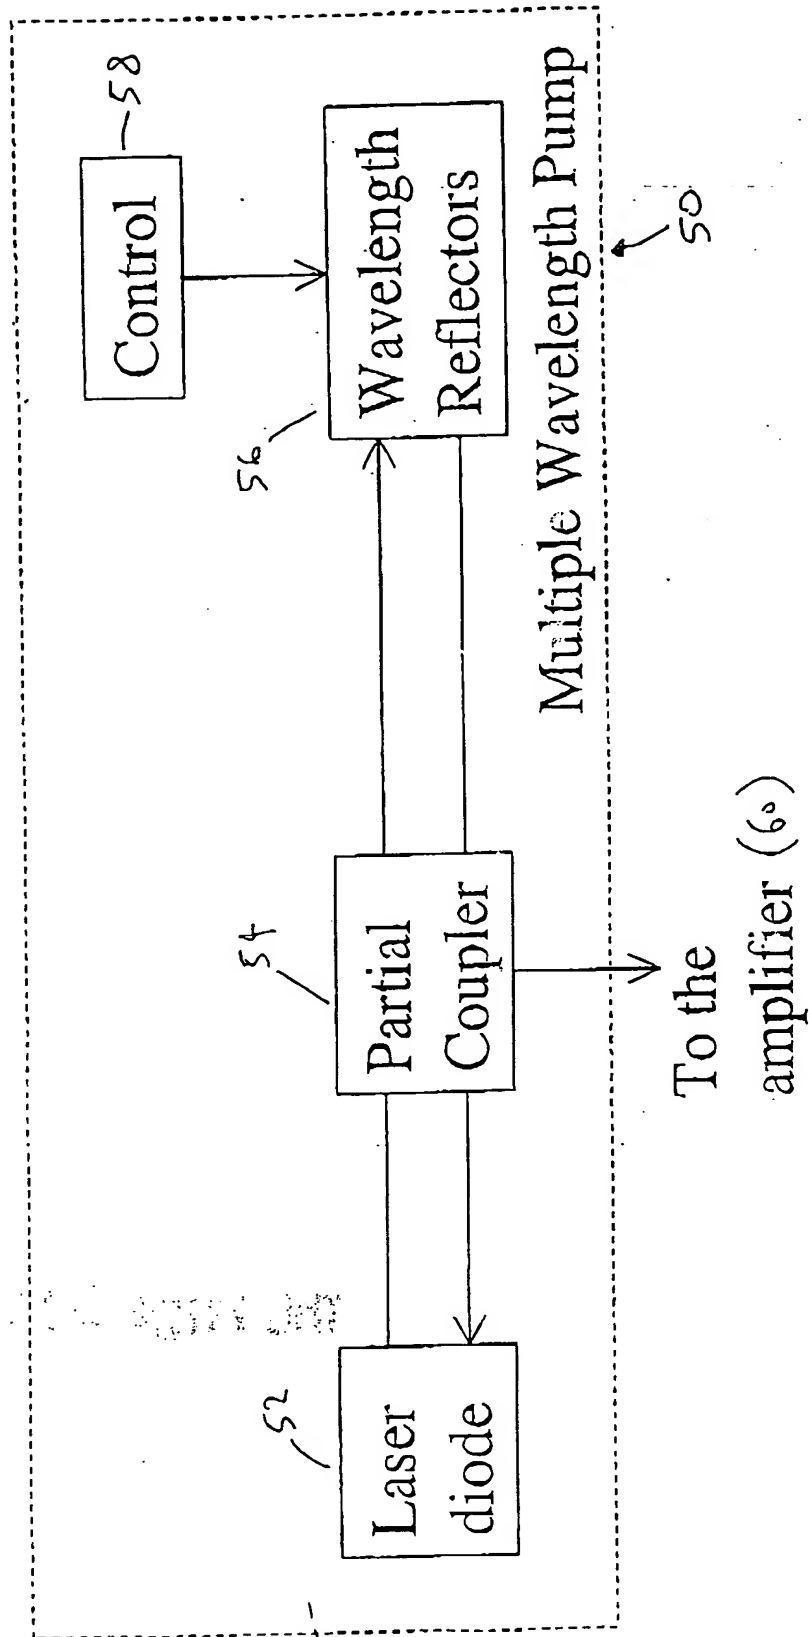


FIG 4